



# TECHNICAL PROFILE




Revised 7/2015

## Circular Arches Using Standard Brick

As an economy measure, some designers attempt to use rectangular brick units in an arch by varying the width of the mortar joints. The graph below can be used to determine the size of the joint for any radius, or to determine the required radius for any joint size. The graph is based on a nominal 3/8" joint (at the bottom of the arch).

for standard size brick, use a radius of 14' or larger, or else use arch-brick units. However, the character of the brick and the desired aesthetic will determine this limit for each project.

In our opinion, if the K dimension exceeds 1/2", the appearance of the arch will be very unprofessional. We suggest

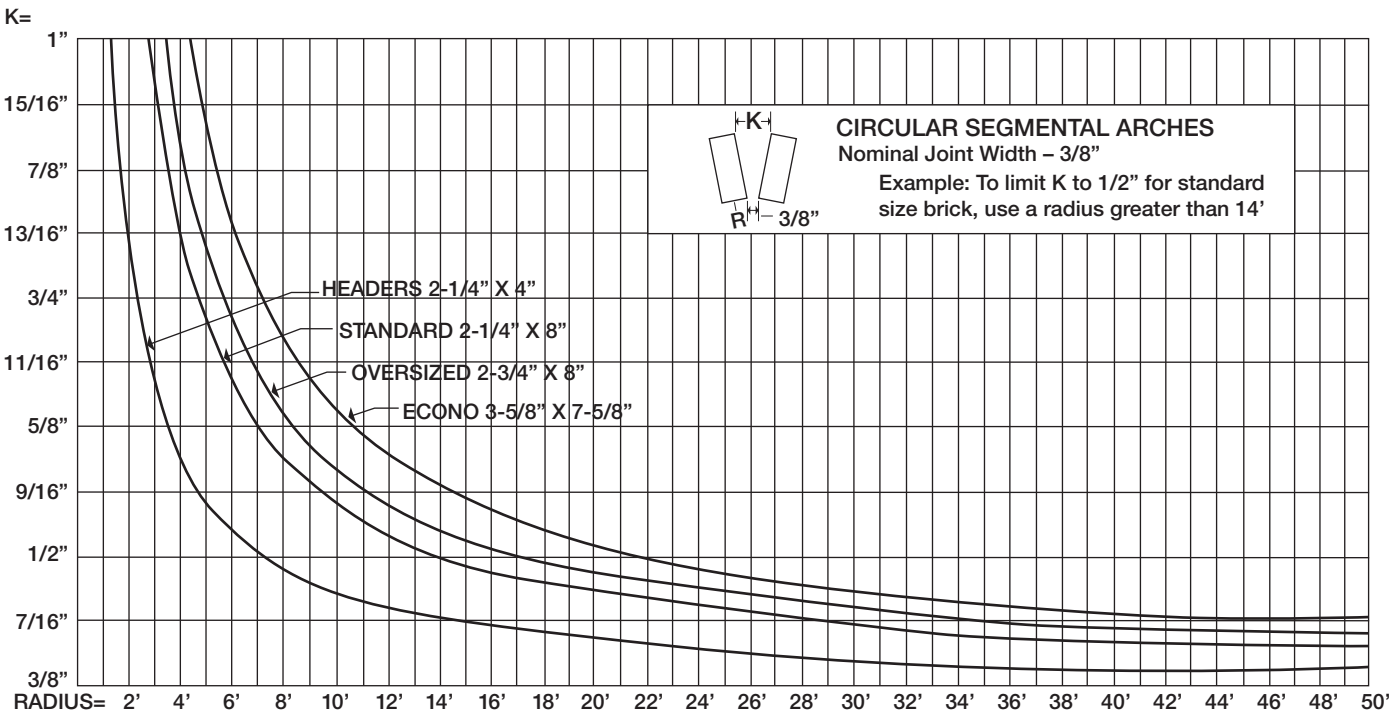



610.374.4011  
info@glengery.com  
www.glengery.com

---

*This document is furnished for informational purposes only and is NOT intended as an EXPRESSED WARRANTY. Glen-Gery accepts no liability for the use of this material. All information should be independently evaluated by a qualified design professional in the context of the specific circumstances in which it is to be applied.*

*Seller warrants title to said goods and that the goods supplied shall meet applicable specifications where such are designated in the Buyer's order. Should the said goods fail to conform to the foregoing warranty, Seller will, at its option replace the same, F.O.B. job site or refund the portion of purchase price paid for such non-conforming goods. SELLER SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR ANY BREACH OF THESE WARRANTIES. THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, INCLUDING, WITHOUT LIMITATION, WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.*