



Curved Brick Walls with Non-Radial Stretchers

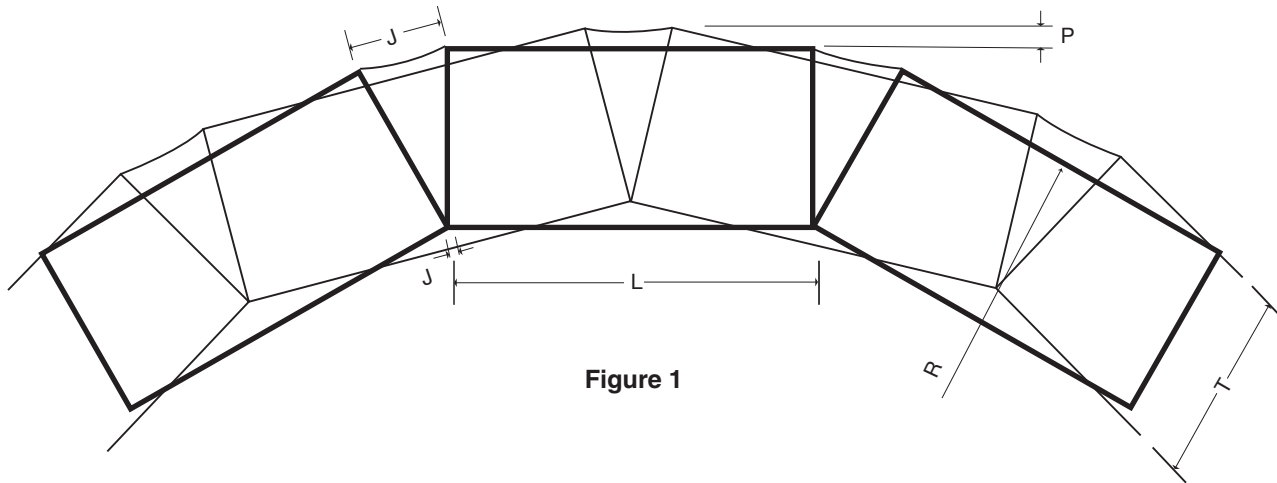


Figure 1

TABLE I: Minimum Radius for "Unclipped" Units (Inside corners of units will touch at Radii shown) [to calculate for other dimensions: $R_{min} = T(L/J - 1)$]		
UNIT TYPE	DIMENSIONS (Figure 1)	MINIMUM RADIUS
"Batt Headers"	$L = 3\text{-}5/8"$; $T = 4"$	$J = 3/8"$; $R > 3'6"$ $J = 1/2"$; $R > 2'9"$
Std. Modular	$L = 7\text{-}5/8"$; $T = 3\text{-}5/8"$	$J = 3/8"$; $R > 6'6"$
Standard	$L = 8"$; $T = 3\text{-}5/8"$	$J = 3/8"$; $R > 6'9"$ $J = 1/2"$; $R > 6'2"$
Utility or Norman	$L = 11\text{-}5/8"$; $T = 3\text{-}5/8"$ $L = 11\text{-}1/2"$; $T = 3\text{-}5/8"$	$J = 3/8"$; $R > 9'8"$ $J = 1/2"$; $R > 7'3"$

TABLE II: Projection (P) vs Radius for Half-Bond			
TO KEEP "P" LESS THAN	USE RADIUS (R) GREATER THAN		Utility Norman
	for: Std. Modular	Standard Size	
1/4"	$R \geq 2'10"$	$R \geq 3'1"$	$R \geq 6'3"$
3/16"	3'9"	4'1"	8'3"
1/8"	5'7"	6'2"	12'6"
1/16"	11'2"	12'3"	25'0"
1/32"	22'4"	24'6"	50'0"



610.374.4011
info@glengery.com
www.glengery.com

This document is furnished for informational purposes only and is NOT intended as an EXPRESSED WARRANTY. Glen-Gery accepts no liability for the use of this material. All information should be independently evaluated by a qualified design professional in the context of the specific circumstances in which it is to be applied.

Seller warrants title to said goods and that the goods supplied shall meet applicable specifications where such are designated in the Buyer's order. Should the said goods fail to conform to the foregoing warranty, Seller will, at its option replace the same, F.O.B. job site or refund the portion of purchase price paid for such non-conforming goods. SELLER SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR ANY BREACH OF THESE WARRANTIES. THE FOREGOING WARRANTIES ARE IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, INCLUDING, WITHOUT LIMITATION, WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.