

primary reason for brick's popularity with architects, designers and builders is its ability to adapt to design criteria. It can be shaped and used in a wide variety of traditional and contemporary details – from arches to sills, copings, columns and treads. Glen-Gery manufactures a complete selection of brick shapes to match its comprehensive line of extruded, molded and handmade brick.

This catalog illustrates the standardized shapes that are available from Glen-Gery's manufacturing facilities. Their availability may differ from plant to plant depending on the size and type of brick produced. Unit identification, size availability and dimensioning are noted on each shape type, making the ordering process simple and straightforward. For these standard shapes, no drawings are necessary; simply call your Glen-Gery representative with the ordering information.

While these shapes can accomplish a wide variety of architectural details, Glen-Gery realizes that the creative process may require shapes



that do not fall within standardized design. To meet this need, Glen-Gery Brick is equipped to produce customized shapes that conform to the designer's specifications. Custom shapes can be produced in either extruded, molded or handmade brick types, although some textures may not be available. Because of the technical expertise necessary to produce these custom shapes, it is important to consult with a Glen-Gery representative or technical advisor for the most practical and cost-effective method of achieving the desired shape.

Glen-Gery's network of Design Services staff are available to coordinate the design and production of custom brick shapes. Please contact them early in the design stage so that all practical options can be explored.


INTRODUCTION	1
TECHNICAL INFORMATION	2-3
Brickwork Design Services	3
WATER TABLES	4-9
On-the-flat	5-7
Rowlock	8-9
SILLS, COPINGS, AND TREADS	10-13
Sills	11-12
Copings	12-13
Treads	13
CORNERS, LIPPED, AND RADIALS	14-19
Corners	14-15
Lipped	15
Radials	16-19
ARCHES	20-21
8-SQUARE SHAPES	22
GLAZED, KLAYCOAT AND ENGOBE BRICK SHAPES	23
CUSTOM SHAPES	24

## **Technical and Specification Information**

len-Gery standardized shapes can be easily ordered by following the established format. An accurate specification should include the number of pieces, proper shape identification, brick size, brick type and color range, as described in this section. Your Glen-Gery representative will be glad to answer any questions or provide more detailed information on standardized shapes, custom shapes, or other aspects of brickwork design and detailing.

#### Position of Brick in the Wall

Interesting brickwork design effects can be achieved by placing brick in other than the normal stretcher position, as illustrated below. Regardless of how the brick is installed in the wall, size dimensions (thickness, height and length of the unit) are always assigned from the stretcher position.

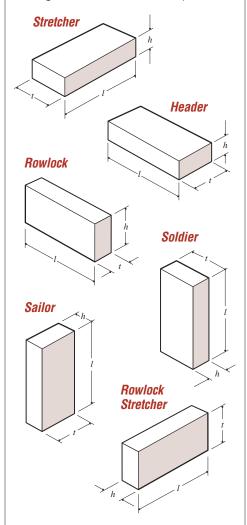

## Glen-Gery Brick Sizes for Standard Shapes

	t	h	l
STANDARD	3-5/8"	2-1/4"	8"
MODULAR	3-5/8"	2-1/4"	7-5/8"
ENGINEER STD	3-5/8"	2-3/4"	8"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"
ECONO	3-5/8"	3-5/8"	7-5/8"
UTILITY	3-5/8"	3-5/8"	11-5/8"
*HMOS	4"	2-3/4"	8-1/2"

\*Handmade Oversize

#### **Glen-Gery Brick Types**

## Extruded ETD



#### Molded M



Handmade HM



#### Glazed GL



#### **Brick Colors & Textures**

Glen-Gery provides a wide selection of brick colors including ranges of white, buff, grey, red, and brown in both through the body and sand finished brick. Glazed and klaycoat brick are available in standard colors as well as an unlimited range of custom colors. Custom colors often require a minimum order. More than thirty different textures are available ranging from architectural smooth and glazed to a rough bark finish. Availability of color and texture varies from plant to plant depending on the type of brick produced.

#### Coring

Coring of standardized brick shapes is a plant option. Any coring requirements to these shapes places them into a custom shape category, requiring drawings.

#### **Shape Identification**

W - Water Table	LT - Left
H - Header	RT - Right
S - Stretcher	SL - Sill
<b>EX</b> – External	CO – Coping
<pre>IN - Internal</pre>	<b>T</b> - Tread
R - Rowlock	RA - Radial
ST - Starter	<b>LP</b> – Lipped
	O – Octagon

**HB** – Hingebrick

8SQ - Eight Square

K – Kerfed

**FA** – Flat Arch


(or) - Requires Choice

**x/y** – Unit serves both functions

1-1/1 - Specific unit size

☐ Throughout this catalog shaded areas denote finished faces.

#### For Example



Requires that left or right be specified for the shape.

Indicates a starter shape.
 Identifies a rowlock position.
 Identifies a specific watertable shape.
 Designates a watertable shape.

#### **Shape Specification**

The following information is required when ordering shapes from this catalog.

Please check with your Glen-Gery representative to ensure that the standardized shape & size requested is available in the specified type and color.











## Glen-Gery Design Advisors share their expertise.

Since its founding a century ago, Glen-Gery has been committed to providing high quality products and professional services to the design/builder community.

Our Design Services staff fulfills this promise by offering practical advice, valuable insights and useful recommendations. They have a complete understanding of the technical applications, requirements and considerations for proper brickwork design. Some of their many areas of expertise include preventing water penetration, custom shape design, movement detailing and exterior paving with brick.

As a service to clients, Glen-Gery Design Services are also available to consult on plan reviews and perform on-site field investigations.

These complimentary services are provided to the professional design and construction community to underscore Glen-Gery's dedication to the promotion of excellence in brickwork design.

## On-the-flat Water Table Systems

There are two types of on-the-flat water table systems based on the brick position in the wall.

- 1) Water table in the header position (H).
- 2) Water table in the stretcher position (S).


Each system is available with companion exterior and interior corners.


## Rowlock Water Table Systems

1) Water table in the rowlock brick position (R).

In this application, rowlock water tables have been rotated to the header position **(H)**.

Water tables can also be turned upside down to achieve a cornice detail.

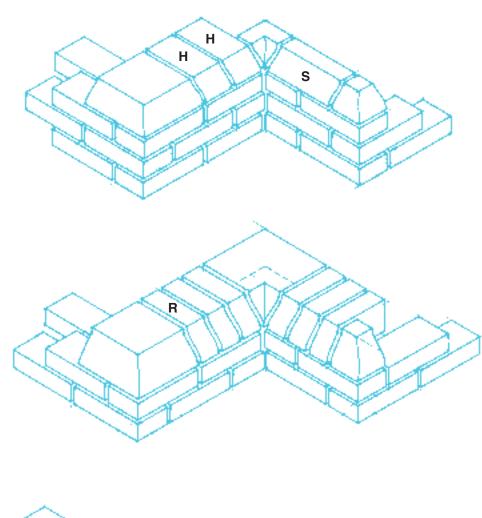









## **Water Tables**

owlock and on-the-flat water tables, once used to reduce water penetration, are now used by architects and designers to achieve decorative design details. These details can range from the


use of a single style for simplicity to a combination of styles to achieve highly ornate brickwork. In addition to their traditional use,



these shapes can be used to add dimension to flat walls, rotated to form door and window jambs, or inverted to form cornice brickwork. Continuity of design can also be transferred into the landscape by using the water tables as caps for walls or edging accents for walkways.







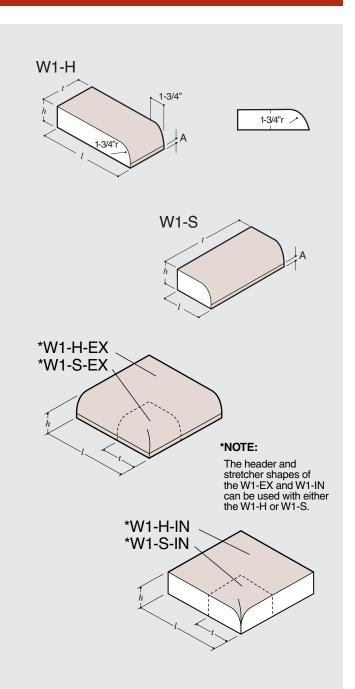



ON-THE-FLAT	t	h	l	А
STANDARD	3-5/8"	2-1/4"	8"	1/2"
MODULAR	3-5/8"	2-1/4"	7-5/8"	1/2"
ENGINEER STD	3-5/8"	2-3/4"	8"	1"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	1"
ECONO	3-5/8"	3-5/8"	7-5/8"	1-7/8"
UTILITY	3-5/8"	3-5/8"	11-5/8"	1-7/8"
HMOS	4"	2-3/4"	8-1/2"	1"

## **Water Tables**

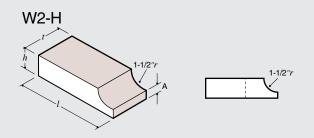











ON-THE-FLAT	t	h	l	Α
STANDARD	3-5/8"	2-1/4"	8"	3/4"
MODULAR	3-5/8"	2-1/4"	7-5/8"	3/4"
ENGINEER STD	3-5/8"	2-3/4"	8"	1-1/4"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	1-1/4"
ECONO	3-5/8"	3-5/8"	7-5/8"	2-1/8"
UTILITY	3-5/8"	3-5/8"	11-5/8"	2-1/8"
нмоѕ	4"	2-3/4"	8-1/2"	1-1/4"

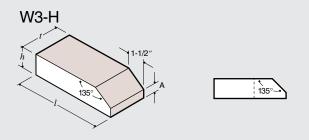










ON-THE-FLAT	t	h	l	А
STANDARD	3-5/8"	2-1/4"	8"	3/4"
MODULAR	3-5/8"	2-1/4"	7-5/8"	3/4"
ENGINEER STD	3-5/8"	2-3/4"	8"	1-1/4"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	1-1/4"
ECONO	3-5/8"	3-5/8"	7-5/8"	2-1/8"
UTILITY	3-5/8"	3-5/8"	11-5/8"	2-1/8"
HMOS	4"	2-3/4"	8-1/2"	1-1/4"

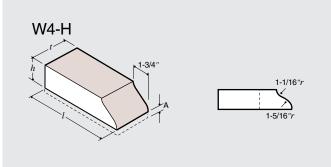










ON-THE-FLAT	t	h	l	Α
STANDARD	3-5/8"	2-1/4"	8"	_
MODULAR	3-5/8"	2-1/4"	7-5/8"	
ENGINEER STD	3-5/8"	2-3/4"	8"	3/8"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	3/8"
ECONO	3-5/8"	3-5/8"	7-5/8"	1-1/4"
UTILITY	3-5/8"	3-5/8"	11-5/8"	1-1/4"
HMOS	4"	2-3/4"	8-1/2"	3/8"

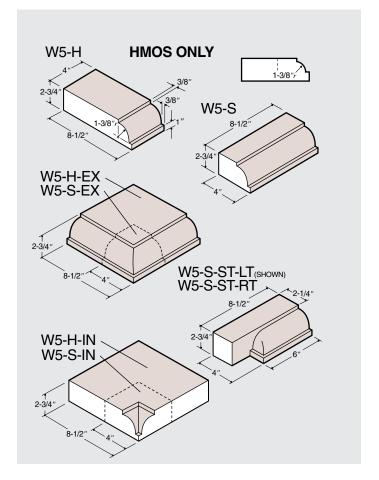

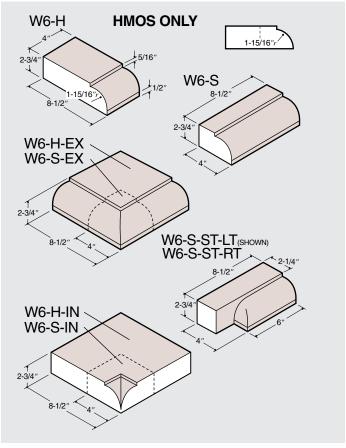


## **Water Tables**

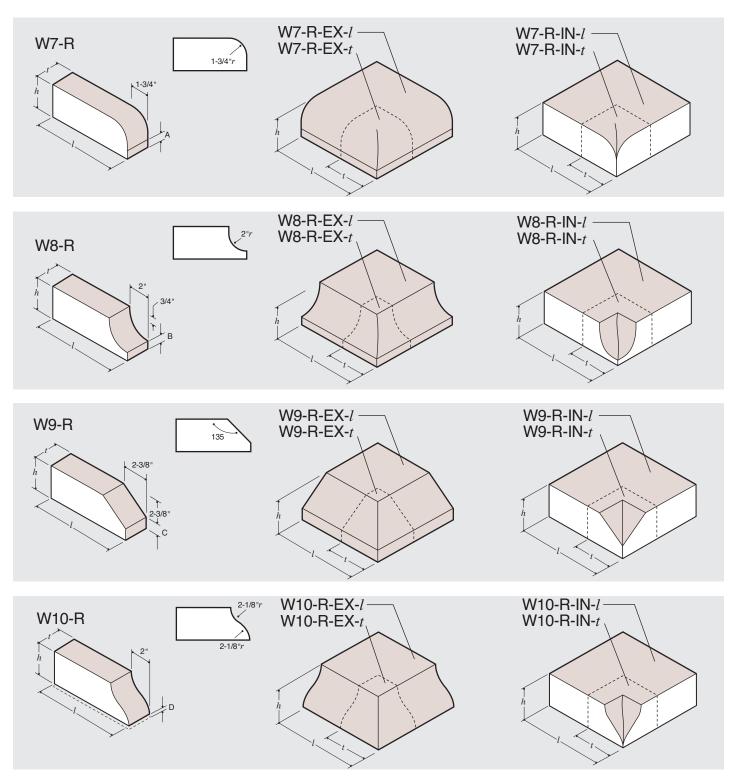

ROWLOCK	h	t	l	Α	В	С	D	Е	F
STANDARD	3-5/8"	2-1/4"	8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
MODULAR	3-5/8"	2-1/4"	7-5/8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
ENGINEER STD	3-5/8"	2-3/4"	8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
ECONO	3-5/8"	3-5/8"	7-5/8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
UTILITY	3-5/8"	3-5/8"	11-5/8"	1-7/8"	7/8"	1-1/4"		3/8"	3/4"
HMOS	4"	2-3/4"	8-1/2"	2-1/4"	1-1/4"	1-5/8"	3/8"	3/4"	1-1/8"

Table at left refers to isometric drawings W7-R through W12-R.

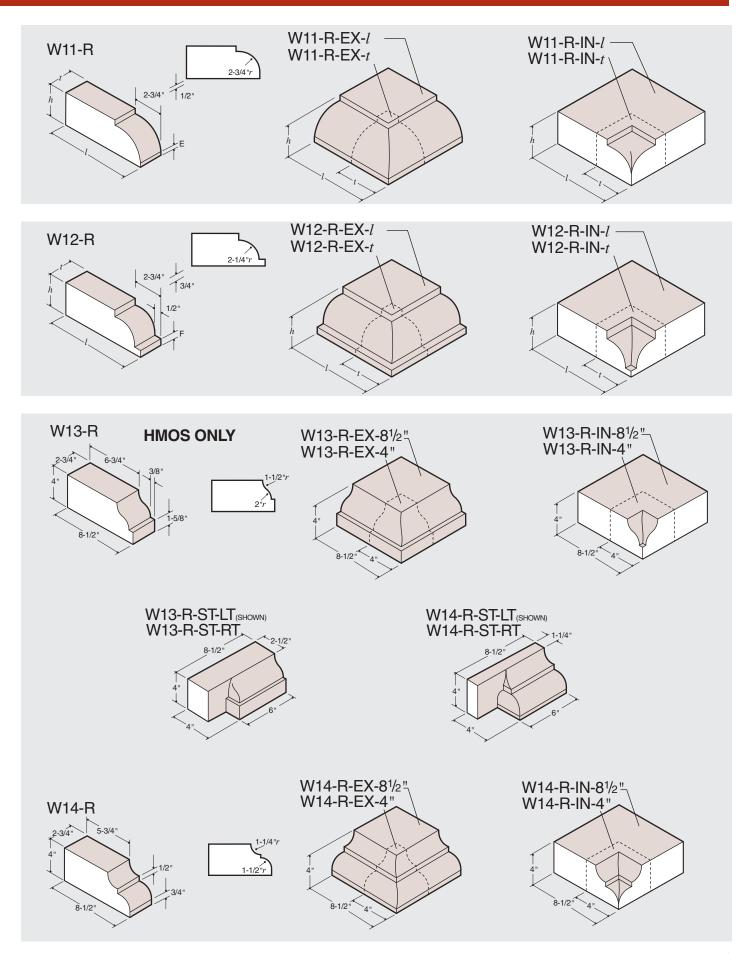

#### Sill Systems


Sills are used to prevent water penetration below window and door openings. Their sloped design drains water away from these critical areas. These shapes are available with companion left and right starters. When ordering these starters, please specify left or right.

#### **Coping Systems**

Copings form a cap on top of a wall that protects the brick masonry below from water penetration. Their design allows water to run off while exposing a minimum number of mortar joints. These shapes and their companion exterior/ interior corners and starters are available in sizes that cap walls constructed of 1-3 wythes of brick.

#### **Tread Systems**

Treads are designed with curves that add safety and beauty to a stairway. They are available in 3-5/8" and 7-5/8" units (4" and 8-1/2" for HMOS) along with their companion corner units.

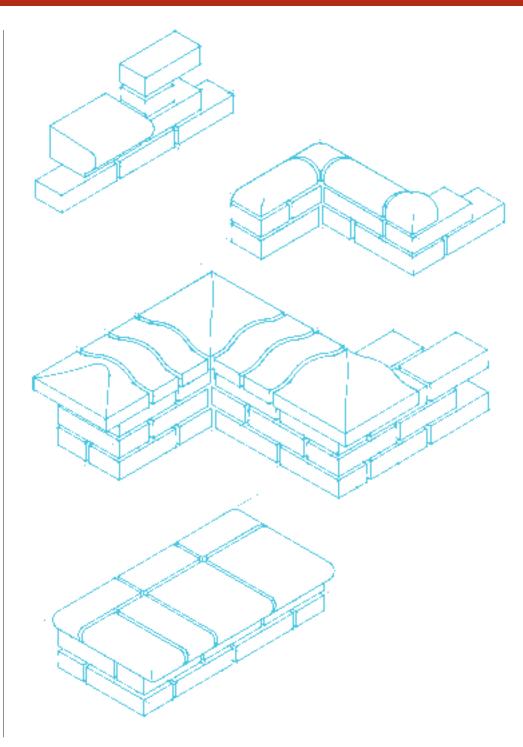









# Sills, Copings, and Treads


he basic function of copings and sills is to reduce the potential for water penetration. This is easily and attractively accomplished with a variety of Glen-Gery brick shapes. Their profiles, whether




angular or curvilinear, add distinctive detailing to wall caps, windows, and door openings. Tread shapes are manufactured to properly finish brick steps and other paving applications.

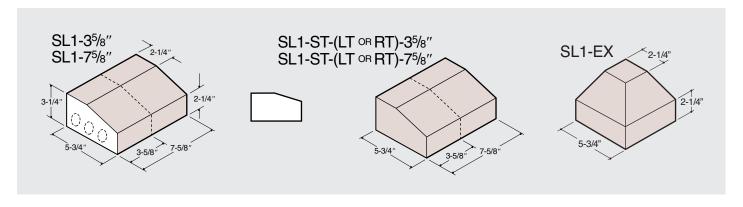

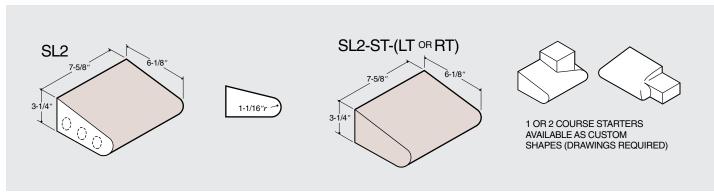

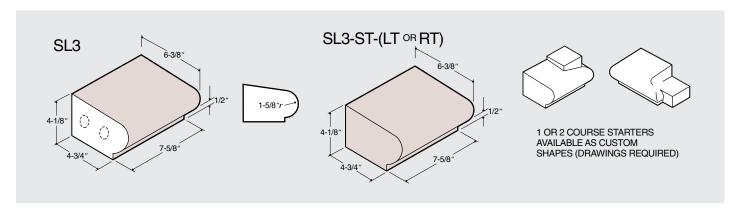

## **Sills and Copings**

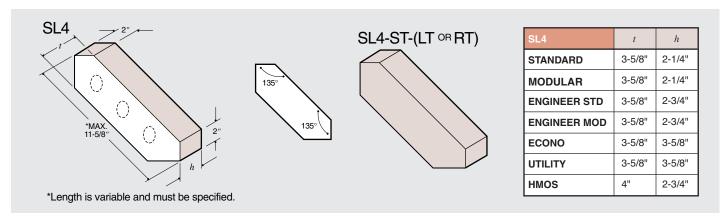

Α

3/8"

3/8"

3/8"

3/8"

3/8"

3/4"

1-13/16"

1-13/16"

1-13/16"

1-13/16'

1-13/16

1-13/16"


8"


7-5/8"


7-5/8"


11-5/8"

8-1/2"

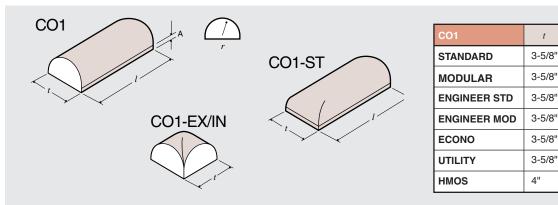

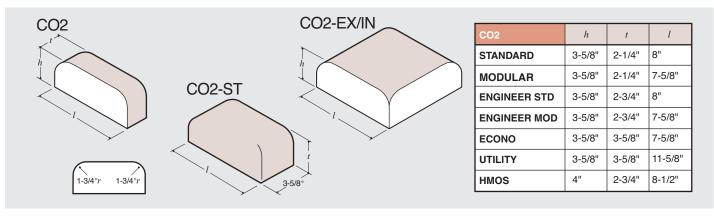

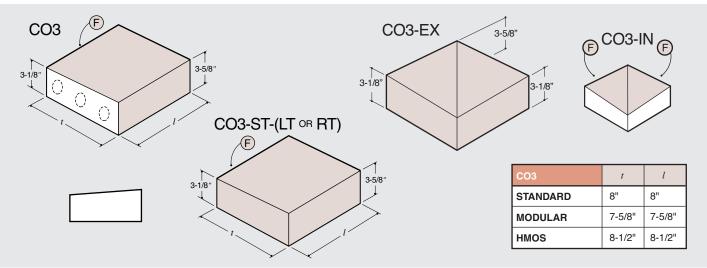

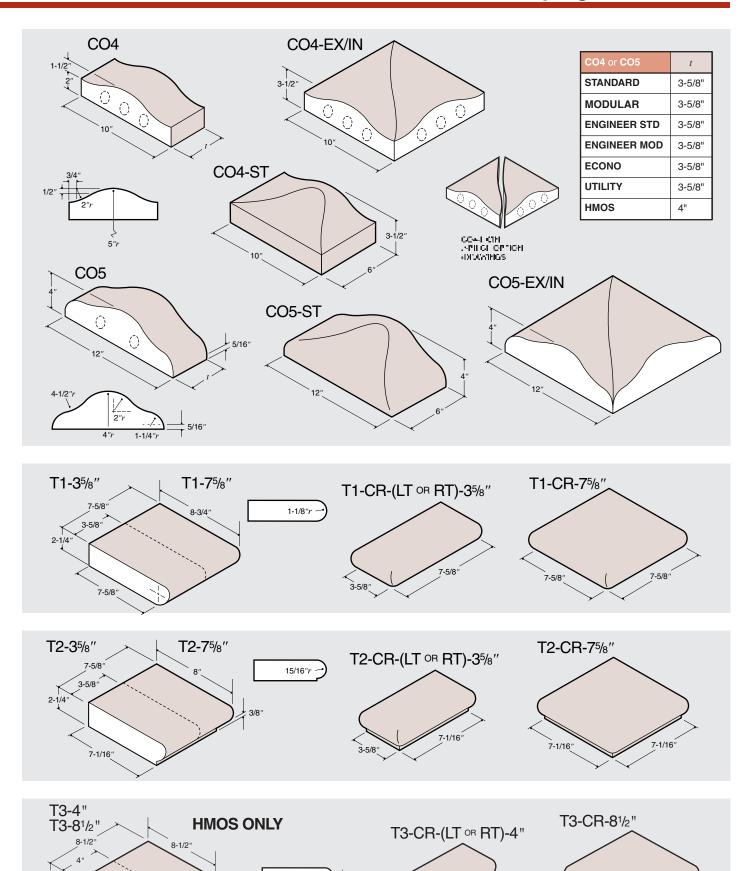


#### **Corner Brick**


The octagon and hingebrick are designed to provide alternative corner treatments that do not require field cutting. The octagon brick shapes form 135° interior or exterior angles while maintaining coursing and visual continuity.


The unique design of the hingebrick offers even greater design flexibility. It allows an unlimited range of angles at corners and can be adapted for use in other brickwork details.


#### **Lipped Brick**


When used with a fixed shelf angle, lipped brick provide inconspicuous, horizontal expansion joints for brick masonry structures. They can also be used with loose lintels above window and door openings.

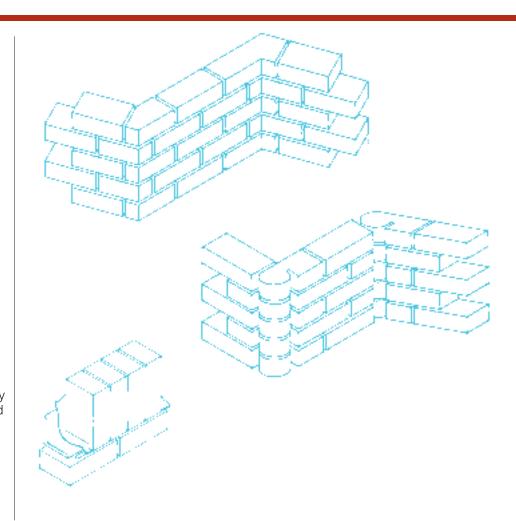









HINGEBRICK	t	h	l
STANDARD	3-5/8"	2-1/4"	3-13/16"
MODULAR	3-5/8"	2-1/4"	3-5/8"
ENGINEER STD	3-5/8"	2-3/4"	3-13/16"
ENGINEER MOD	3-5/8"	2-3/4"	3-5/8"
ECONO	3-5/8"	3-5/8"	3-5/8"
*UTILITY	3-5/8"	3-5/8"	3-5/8"
HMOS	4"	2-3/4"	4"

\* 1/3 Bond


O1-EX & O1-IN	t	h	l	Α
STANDARD	3-5/8"	2-1/4"	6-3/16"	2"
MODULAR	3-5/8"	2-1/4"	6"	2"
ENGINEER STD	3-5/8"	2-3/4"	6-3/16"	2"
ENGINEER MOD	3-5/8"	2-3/4"	6"	2"
ECONO	3-5/8"	3-5/8"	6"	2"
*UTILITY	3-5/8"	3-5/8"	6"	2"
**UTILITY	3-5/8"	3-5/8"	8"	2"
HMOS	4"	2-3/4"	6-7/8"	2-3/8"

\*1/3 Bond \*\*1/2 Bond


# Corners, Lipped, and Radials


len-Gery's corner, lipped and radial brick shapes are manufactured to provide the masonry units necessary to achieve sound brickwork detailing while offering greater design flexibility.















(BOTTOM VIEW)


LP1 & LP2	t	h	l	Α	В	С
STANDARD	3-5/8"	2-1/4"	8"	2-7/8"	1-5/8"	7-3/8"
MODULAR	3-5/8"	2-1/4"	7-5/8"	2-7/8"	1-5/8"	7"
ENGINEER STD	3-5/8"	2-3/4"	8"	2-7/8"	2-1/8"	7-3/8"
ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"	2-7/8"	2-1/8"	7"
ECONO	3-5/8"	3-5/8"	7-5/8"	2-7/8"	3"	7"
UTILITY	3-5/8"	3-5/8"	11-5/8"	2-7/8"	3"	11"
HMOS	4"	2-3/4"	8-1/2"	3-1/4"	2-1/8"	7-7/8"

### **Radials**

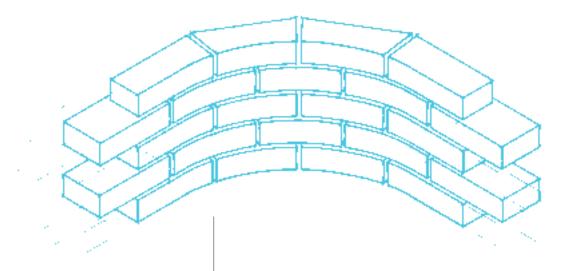

#### **Radial Brick**


Internal and external radial brick shapes, along with their companion starters, can be used to create details ranging from curtain-like walls to towering columns. These shapes are designed to form smooth, sweeping curves in brickwork without producing shadows or requiring field cuts.

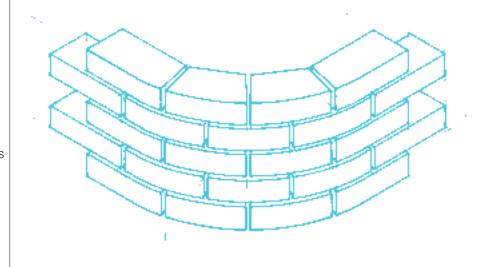

FPO-10436










Dimensions for Glen-Gery's standardized radial brick are computed so that the arc length appears equal to the length of the accompanying stretcher units. They are also designed so that a whole number of brick fall within a 90° segment, eliminating the need to cut brick to achieve tangency at 90°, 180° or 270°.

Other radii are available as custom shapes and require





architectural drawings.



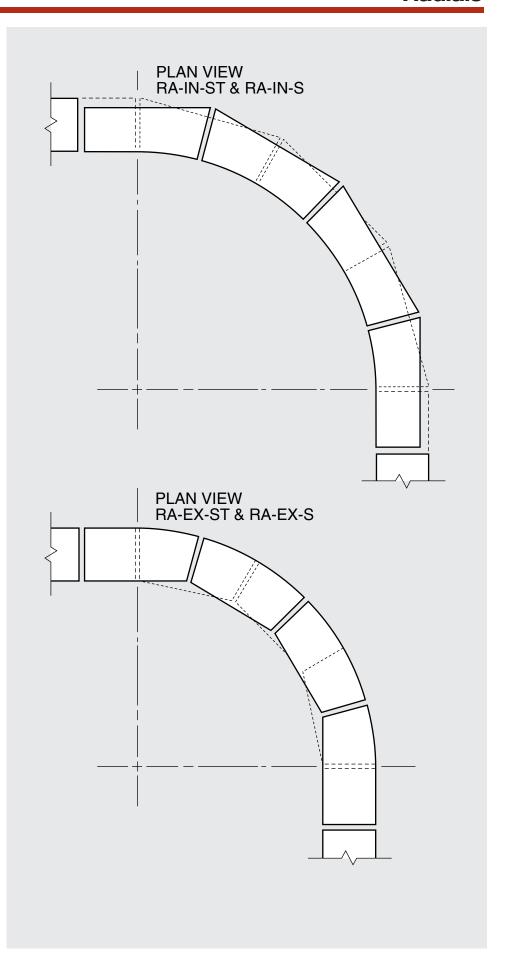

## **Radials**

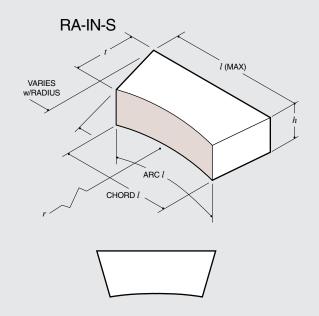

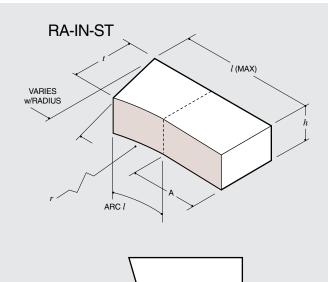

RA-IN-S	t	h	l (MAX)
*STANDARD	3-5/8"	2-1/4"	11-5/8"
MODULAR	3-5/8"	2-1/4"	11-5/8"
*ENGINEER STD	3-5/8"	2-3/4"	11-5/8"
*ENGINEER MOD	3-5/8"	2-3/4"	11-5/8"
*ECONO	3-5/8"	3-5/8"	11-5/8"
**UTILITY	3-5/8"	3-5/8"	11-5/8"
*HMOS	4"	2-3/4"	11-5/8"

RA-IN-S	t	h	l (MAX)
*STANDARD	3-5/8"	2-1/4"	11-5/8"
MODULAR	3-5/8"	2-1/4"	11-5/8"
*ENGINEER STD	3-5/8"	2-3/4"	11-5/8"
*ENGINEER MOD	3-5/8"	2-3/4"	11-5/8"
*ECONO	3-5/8"	3-5/8"	11-5/8"
**UTILITY	3-5/8"	3-5/8"	11-5/8"
*HMOS	4"	2-3/4"	11-5/8"

*Standardized	radii	available	in all	brick	sizes
except utility.					

RADII	ARC l	CHORD	#/90°
16"	8"	7-15/16"	3
24"	7-3/16"	7-1/8"	5
36"	7-11/16"	7-11/16"	7
48"	8"	8"	9
60"	7-1/2"	7-1/2"	12

<sup>\*\*</sup>Standardized radii available in utility size unit.

RADII	ARC l	CHORD	#/90°
24"	9-1/16"	9"	4
36"	9-1/16"	9"	6
48"	10-3/8"	10-3/8"	7
60"	10-1/16	10-1/16"	9


RA-II	N-ST	t	h	Α	l (MAX)
*STA	NDARD	3-5/8"	2-1/4"	4"	11-5/8"
*MOI	DULAR	3-5/8"	2-1/4"	3-13/16"	11-5/8"
*ENG	INEER STD	3-5/8"	2-3/4"	4"	11-5/8"
*ENG	INEER MOD	3-5/8"	2-3/4"	3-13/16"	11-5/8"
*ECC	NO	3-5/8"	3-5/8"	3-13/16"	11-5/8"
	1/2 BOND	3-5/8"	3-5/8"	5-13/16"	11-5/8"
**UTILITY	1/3 BOND	3-5/8"	3-5/8"	3-13/16"	11-5/8"
*	2/3 BOND	3-5/8"	3-5/8"	7-13/16"	11-5/8"
*НМС	os	4"	2-3/4"	4-1/4"	11-5/8"

\*Standardized radii available in all brick sizes except utility.

RADII	ARC l
16"	4"
24"	3-9/16"
36"	3-13/16"
48"	4"
60"	3-3/4"


\*\*Standardized radii available in utility size unit.

RADII	ARC l			
TIADII	1/2B	1/3B	2/3B	
24"	4-1/2"	6"	3"	
36"	4-1/2"	6"	3"	
48"	5-3/16"	6-7/8"	3-7/16"	
60"	5"	7-1/4"	3-3/8"	

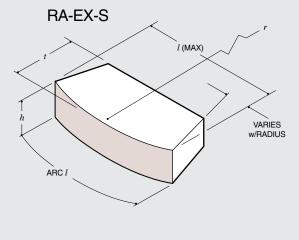




RA-EX-S	t	h	l (MAX)
*STANDARD	3-5/8"	2-1/4"	8"
*MODULAR	3-5/8"	2-1/4"	7-5/8"
*ENGINEER STD	3-5/8"	2-3/4"	8"
*ENGINEER MOD	3-5/8"	2-3/4"	7-5/8"
*ECONO	3-5/8"	3-5/8"	7-5/8"
**UTILITY	3-5/8"	3-5/8"	11-5/8"
*HMOS	4"	2-3/4"	8-1/2"



RADII	ARC l	#/90°
16"	8"	3
24"	7-3/16"	5
36"	7-11/16"	7
48"	8"	9
60"	7-1/2"	12

\*\*Standardized radii available in utility size unit.

m danty 0.20 drill				
RADII	ARC l	#/90°		
24"	9-1/16"	4		
36"	10-5/16"	5		
48"	10-3/8"	7		
60"	11-3/8"	8		

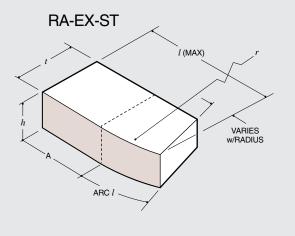



RA-I	EX-ST	t	h	А	l (MAX)
*STA	NDARD	3-5/8"	2-1/4"	4"	8"
*MOI	DULAR	3-5/8"	2-1/4"	3-13/16"	7-5/8"
*ENG	INEER STD	3-5/8"	2-3/4"	4"	8"
*ENG	INEER MOD	3-5/8"	2-3/4"	3-13/16"	7-5/8"
*ECC	NO	3-5/8"	3-5/8"	3-13/16"	7-5/8"
  ≥	1/2 BOND	3-5/8"	3-5/8"	5-13/16"	11-5/8"
**UTILITY	1/3 BOND	3-5/8"	3-5/8"	3-13/16"	11-5/8"
*	2/3 BOND	3-5/8"	3-5/8"	7-13/16"	11-5/8"
*НМС	os	4"	2-3/4"	4-1/4"	8-1/2"

\*Standardized radii available in all brick sizes except utility.


RADII	ARC l
16"	3-1/16"
24"	3"
36"	3-7/16"
48"	3-11/16"
60"	3-1/2"


\*\*Standardized radii available in utility size unit.

Otanadraizou radii avanabio iii atiirty bizo ariit.						
RADII	ARC l					
	1/2B	1/3B	2/3B			
24"	4-1/2"	6"	3"			
36"	5-7/16"	7-1/4"	3-5/8"			
48"	5-3/16"	6-7/8"	3-7/16"			
60"	5-11/16	7-1/2"	3-3/4"			

#### Flat Arch


Glen-Gery's flat arches achieve the look of the classic jack arch without the cost of custom-made arch pieces. The voussoirs are designed with a 70° skew-back angle and 3/8" nominal mortar joint. All the flat arch pieces, except the keystone, are the same size and shape and have parallel vertical sides. Please specify the masonry opening and the face brick unit size when ordering.

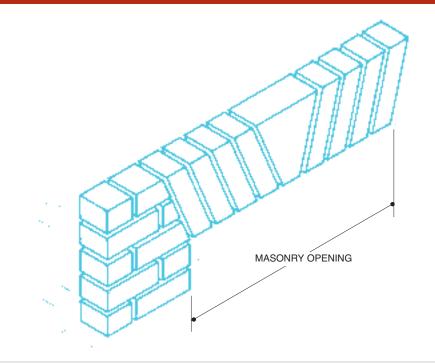


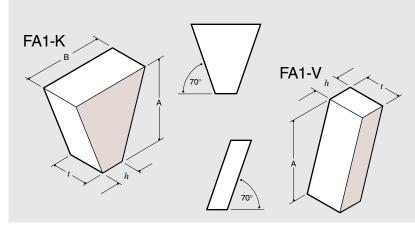

FA1-K & FA1-V	t	h	А	В
STANDARD	3-5/8"	2-1/4"	•7-5/8"	7-13/16"
MODULAR	3-5/8"	2-1/4"	•7-5/8"	7-13/16"
ENGINEER STD	3-5/8"	2-3/4"	•9-1/8"	9-3/8"
ENGINEER MOD	3-5/8"	2-3/4"	•9-1/8"	9-3/8"
ECONO	3-5/8"	3-5/8"	∘7-5/8"	9-3/16"
UTILITY	3-5/8"	3-5/8"	∘7-5/8"	9-3/16"
HMOS	4"	2-3/4"	•9-1/8"	9-3/8"

- Equals 3 courses of companion facebrick stretchers.
- ° Equals 2 courses of companion facebrick stretchers.

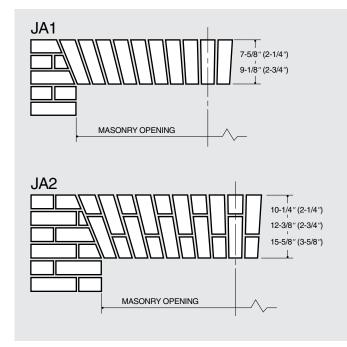

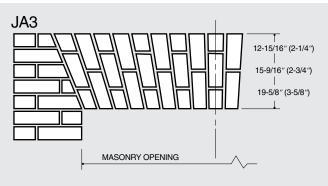


#### **Classic Jack Arch**


The typical 1, 2, and 3-brick classical jack arches, as manufactured by Glen-Gery, are calculated with a 70° skew-back angle and a 3/8" nominal mortar joint. To order a jack arch, the type of arch, masonry opening and the face brick unit size must be specified. The jack arch brick are individually boxed and tagged for location.

## **Arches**

rick arches invoke a sense of tradition and strength and have become a standard element in many architectural styles. For structural integrity and appeal, arches should be constructed with brick shapes to properly span the opening. Glen-Gery offers a variety of standard arches which can be used as functional or decorative elements in a building design.



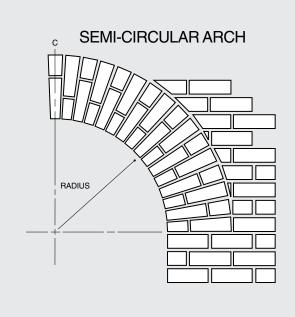


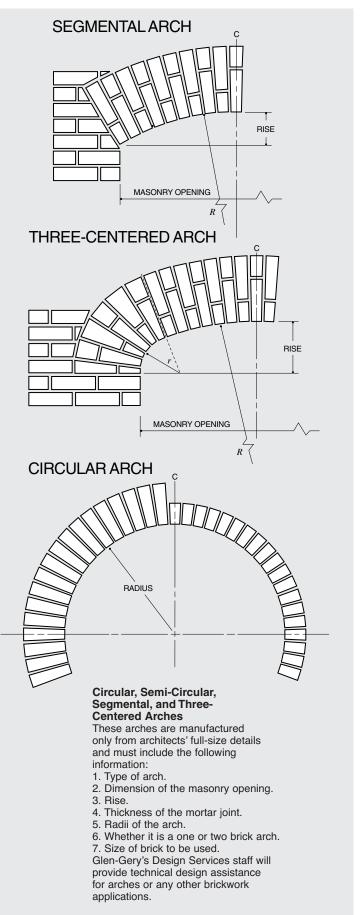

# 8-Square

len-Gery's 8-Square were developed as large masonry unit alternatives for commercial construction. These large units speed construction while providing a unique pattern effect for larger structures. A system of shapes is available to enhance design flexibility. All 8-Square shapes are available in wire-cut texture only.




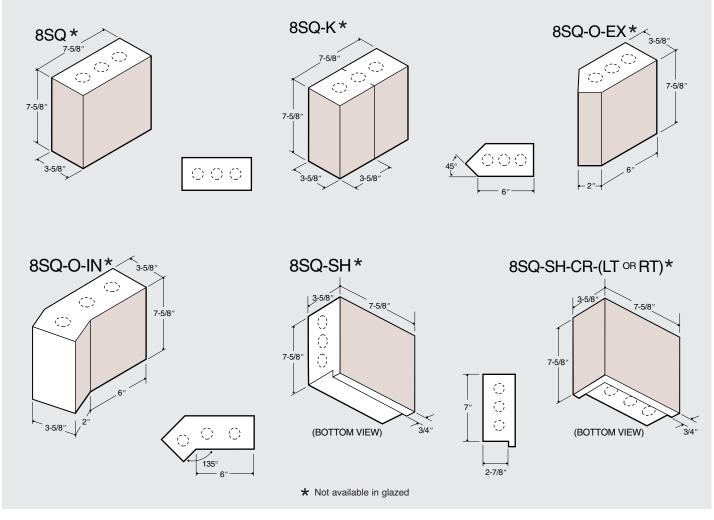


# Glazed, Klaycoat & Engobe Brick





len-Gery's coated brick meet the highest standards of uniformity, quality, and durability. In addition to these brick shapes, Glen-Gery's Hanley plant can provide custom shapes unique to its architectural line of coated face brick.












### **Custom Shapes**

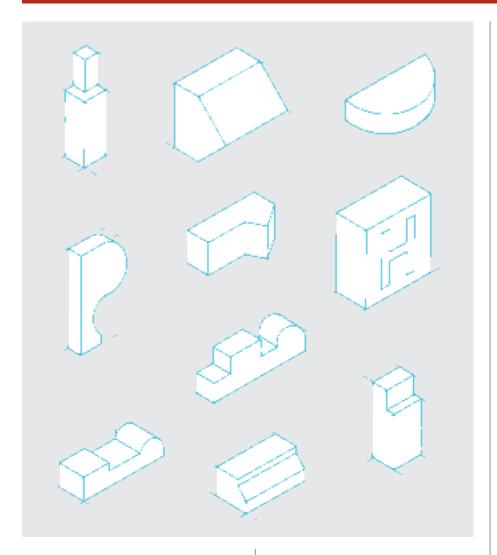

any interesting brickwork design details can be achieved with the Glen-Gery standardized shapes illustrated in this catalog. There are projects, however, that require a custom designed brick shape to achieve a specific detail or unusual effect.

Glen-Gery welcomes the opportunity to produce unusual shapes, but it must be remembered that an intricate design demands a considerable degree of skill and expertise to make and may take longer to produce than a standardized shape. Custom shapes also require detailed, contractor-approved drawings prior to production.

Consult your Glen-Gery representative early in the project to discuss the procedure and requirements of specifying Glen-Gery custom shapes. Our technical staff and

manufacturing personnel stand ready to offer you assistance in turning your ideas into reality in the most practical and cost-effective manner.

#### **Brick Sculptures**

The ultimate brick shaping process takes place when an artist uses the material to create beautiful brick sculptures. Each sculpture can be designed to meet the requirements of the owner, the building or the environment, and can be executed in any size for interior and exterior walls or panels. From abstract to realistic, brick bas-relief adds a unique and timeless element of artistic expression to any building. Glen-Gery has experience in bringing artist and material together to create specialized sculptures. For more information, please contact your Glen-Gery representative.









Discover the possibilities at glengery.com

